



Project _____
 Location _____
 Item # _____
 Qty _____

VALUE SERIES

Models: VTP-139
 VTP-175

Standard Features

- Factory balanced refrigeration system, environmentally friendly R-134A Refrigerators.
- Stainless steel construction with anodized aluminum profile.
- Front curved glass design.
- Service side glass sliding door.
- Incandescent internal lighting to display the products.
- Comes standard with 1/3rd gastronorm pans - 1.5" deep.
- Self contained refrigeration system.
- Compressor mount on right side.
- Cold plate design underneath the pans to keep products fresher and maintain products at 36° - 46°F temperature in food pans.



VTP-139 Shown



VTP-175 Shown



Conforms to UL and NSF-7 standards

REFRIGERATED TAPAS CASES

Model	Doors	Pans	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions			Shipping	
								L	D	H	Wt.	Cubes
VTP-139	2	6	4.2	1/5	115/50/1	5-15P	8' (2,439mm)	54 ^{7/8} " (1,394 mm)	15 ^{3/4} " (400 mm)	9 ^{7/8} " (251 mm)	112 (50.8 Kg)	7.2 (0.20 m ³)
VTP-175	2	8	4.2	1/5	115/50/1	5-15P	8' (2,439mm)	68 ^{7/8} " (1,749 mm)	15 ^{3/4} " (400 mm)	9 ^{7/8} " (251 mm)	135 (61.2 Kg)	9 (0.25 m ³)



Fagor Commercial, Inc.

13105 N.W. 47th Avenue, USA


Miami, FL 33054

Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173

1 - 866 - GO FAGOR



www.fagorcommercial.com

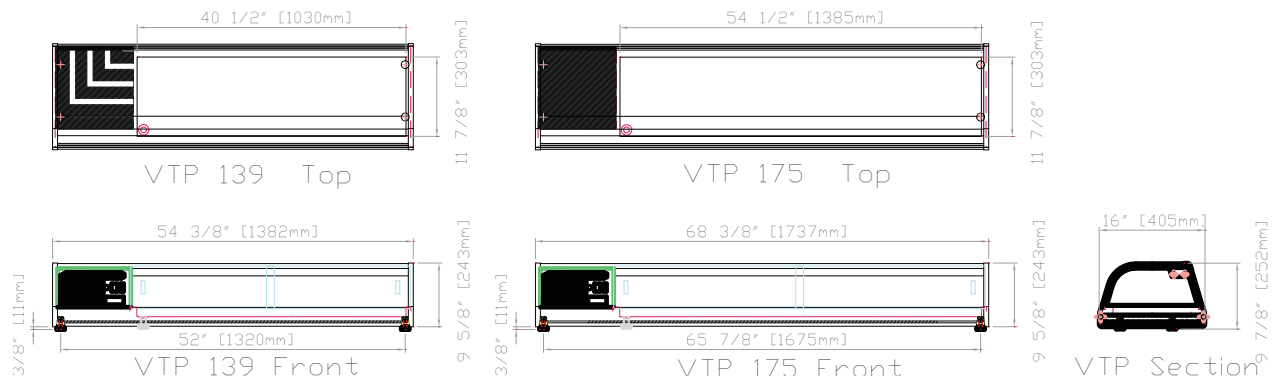

SPECIFICATIONS

Construction: Heavy duty stainless steel construction with anodized aluminum profile. Sliding glass service door. Curved glass design.

Unit comes complete with CFC-Free polyurethane insulation, foamed in place.

Refrigeration system: Self contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Static refrigeration below the pans.

Evaporator coil is mounted on the left side of the unit. Automatic condensate evaporator, no drain connection required.

Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.

Access for the condensing unit behind the unit for easy cleaning and maintenance.

Cabinets are designed to maintain temperatures between 36° - 46°F in the interior cabinet.

Lights: Interior incandescent light.

Others: Unit is supplied standard with an 8' cord and plug (Nema 5-15p).

Warranty: One year labor and parts warranty. 5 year compressor warranty (Continental U.S.A. & Canada only).



Fagor Commercial, Inc.
 13105 N.W. 47th Avenue, USA
 Miami, FL 33054
 Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice.
 Printed in the USA • 05/10